



Omega Friction-Disconnect Wrist Technology

Product Code: OMEGA R OMEGA L, OMEGA RB, OMEGA LB, OMEGA M, OMEGA MB

Features

- Superior body powered wrist technology, designed by prosthetic users for prosthetic users.
- Totally machined from surgical stainless steel and aircraft aluminum
- “Tool-less” adjustable, rotational friction control 12 locking positions
- Lock-In, Lock-Out and Lock-Open disconnect features
- Easy to insert, precision-fit, OMEGA disconnect insert
- Simple, reliable, OMEGA disconnect, insert capture technology
- Rock solid “fit” and significantly stronger than all other competition
- Standard laminating ring fabrication

L Code:

L6615 (Wrist)


L6616 (Inserts)

SPECIFICATIONS

Product Code	Round Large		Oval Large		Oval Medium	
	OMEGA R	OMEGA RB	OMEGA L	OMEGA LB	OMEGA M	OMEGA MB
Color:	Aluminum Satin	Black	Aluminum Satin	Black	Aluminum Satin	Black
Major OD:	2.04 in. (5.18 cm)		2.4 in. (6 cm)		2.0 in. (5 cm)	
Minor OD:	N/A		1.7 in. (4.5 cm)		1.5 in. (3.8 cm)	
Total Height with Laminating Ring	1.03 in. (2.62 cm)		1.0 in. (2.5 cm)		1.0 in. (2.5 cm)	
Height Face Plate (Only):	.32 in. (.8 cm)		.32 in. (.8 cm)		.32 in. (.8 cm)	
Weight:	3.6 oz, 103.1 g		3.9 oz, 111.2 g		3.2 oz, 89.4 g	



OM005
For Use With
Split Hooks

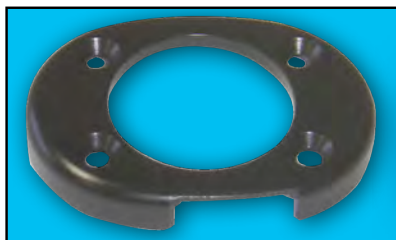

Black Available (Round & Oval)



OM003 Omega Disconnect Inserts

